

Link-Belt®

LS-98A

Wire Rope Crawler Excavator/Crane



LS-98A Dragline production capability


More engine horsepower to the rope drums



Angle boompoint

Angle boompoint

Sheaves and roller-type hoist rope guards are mounted on anti-friction bearings for increased rope and sheave life.

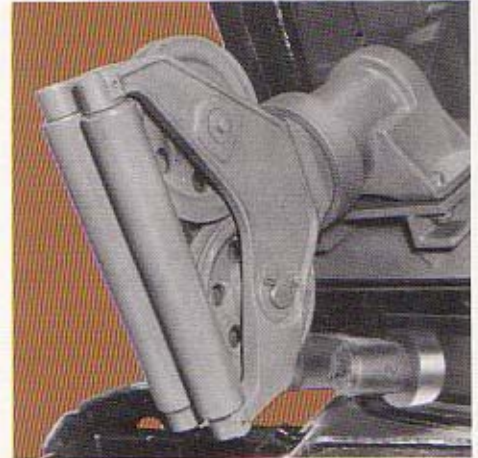

Full-revolving fairlead

Rope drum horsepower

The usable rope drum horsepower is the net engine horsepower **less** frictional losses of the power train. The Link-Belt® LS-98A excavator/crane power train, with its machine cut gears, anti-friction bearings and in-line shaft mountings reduce frictional losses. Thus, more usable engine horsepower is available at the rope drums, maintaining high production standards.

Full-revolving fairlead

Rotates to insure full inhaul rope support in all positions. All moving parts are mounted on anti-friction bearings. Saves inhaul rope and permits greater economy.

